







TANK LEVEL PRESSURE GAUGES, TYPE PFS-TL

TYPE PFS-TL

STANDARD MODEL

CASE	: 160 mm, bayonet, AISI304/1.4301, IP-45 back flange, capillary bottom entry
WETTED PARTS	: sensing element AISI316/1.4401 welded diaphragm
DIAL	: aluminium, black figures on white according to tank table, see sample
WINDOW	: mineral glass 4 mm
POINTER	: aluminium black
RANGE	: 0 - 800 mmWG upto 0 - 10.000
ACCURACY	: mmWG : ± 1.6% F.S./class 1.6
AMBIENT TEMP.	: 0-55°C, fully compensated
CAPILLARY	: red copper with yellow PVC
MOVEMENT	cover : nickel plated brass

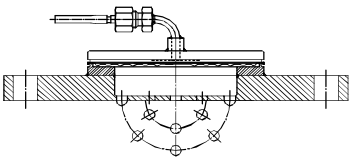

TYPE		MODEL		CASE DIAMETER (Ø in mm)	
				160	
ES		<i>PFS-TL160XB-ES</i>			
EM		<i>PFS-TL160XB-EM</i>			
IM		<i>PFS-TL160XB-IM</i>			
FL		<i>PFS-TL160XB-FL</i>			
Capillary		EXTRA COSTS			
		Capillary	Cover		
STANDARD		Red Copper	Yellow PVC		
ARMoured CAPILLARY		Red Copper	Armour AISI304/1.430 1		