

# eurotron instruments NL



1 psi VS 10 Beaufort



## HIGH IMPACT POLYETHYLENE CASE

### *Keep the elements where you want them*

Eurotron employs the famous Peli™-brand cases in order to protect its chart recorders from any outside influence. Two solid components, injection moulded from a single piece and designed to provide complete protection in even the most extreme conditions. Thanks to the high-quality O-ring seal, dust, water and chemicals are kept where they belong: OUTSIDE. Peli™ cases are extremely impact and shock-resistant, light and easy to carry. They are made from acid-proof polyethylene, and are water and dust-tight in accordance with the IP-67 standard.



## SEALED + SHOCKPROOF 100 % WATERPROOF

### *Opposites attract at Eurotron*

Frequently, sensitivity and extreme conditions do not make for a happy couple. Nevertheless, Eurotron chart recorders form the keystone of an intimate marriage between these two extremes. Their construction, the materials used and the extremely close tolerances ensure a flawless and precise application. The Peli™ case does the rest and guarantees reliability, time and time again, for a lifetime, in conditions ranging from the Arctic Ocean to the Death Valley.



## 3 PEN RECORDING

### *No worries!*

Pressure and temperature, any combination will do. The sky is the limit. Eurotron chart recorders keep on working, regardless of the conditions. All measurements are, and will remain, 100% reliable and accurate.



## CHART DRIVES

### *As time goes by...*

In order to guarantee that our chart recorders keep on working, we have several systems available: mains-powered, battery-operated (Swiss-made), mechanical spring-wound... In each case our chart drives completely exceed the prescribed operational service life. Problem-free, defect-free and inspiringly reliable.



## MODULAR SYSTEM


### *Build your own legend*

Our chart recorders have been modularly constructed. They include one, two or three pens, and are intended for recording pressure and/or temperature. Whatever chart recorder you want to use, the components are always of legendary quality and mutually interchangeable. When combined with your own logo, a one-of-a-kind chart recorder is born.






TEMPERATURE CALIBRATION -200/600°C (-328/1100°F)

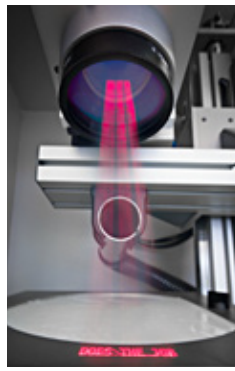

PRIVATE LABELING

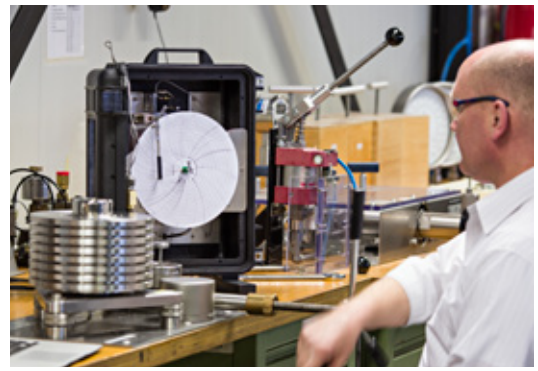

PRESSURE CALIBRATION 0-4000 bar (60.000 psi)

Eurotron supplies to customers around the world mainly in the chemical, petrochemical, offshore, oil & gas, shipping, food & dairy and pharmaceutical industries.

Due to our large stock of parts we are able to supply within 24 hours. Instrumentation according to customer specifications? No problem! Your wish is our command.

<ul style="list-style-type: none"> <li>• Chart Ø163 / 6"</li> <li>• IP45</li> <li>• Compact</li> <li>• Only 3.1kg / 6.8 lbs</li> </ul>	<ul style="list-style-type: none"> <li>• Chart Ø223 / 9"</li> <li>• IP65</li> <li>• Up to 3 felt tip pens</li> <li>• Only 6.4kg / 14.1 lbs</li> </ul>	<ul style="list-style-type: none"> <li>• Chart Ø300 / 12"</li> <li>• IP65</li> <li>• Lockable</li> <li>• Only 10.6kg / 23.4 lbs</li> </ul>	<ul style="list-style-type: none"> <li>• Chart Ø223 / 9"</li> <li>• Only 6.4kg / 14.1 lbs</li> <li>• Chart Ø300 / 12"</li> <li>• Only 10.6kg / 23.4 lbs</li> </ul>	
<p>Portable, flush or wall mounted Case and wetted parts 316L Stainless Steel ATEX  II 2G c or II 2D c compliant</p>			<ul style="list-style-type: none"> <li>• Original Peli™ Case</li> <li>• Vortex valve™</li> <li>• IP67</li> <li>• Reinforced Padlock Protectors</li> <li>• Virtually indestructible</li> <li>• Lightweight design</li> <li>• Meets airline carry-on regulations</li> </ul>	
<p>• Zero adjustable pointer • Standard 100 charts included • Standard extra felt tip pen</p>				

*Test me, I know what I'm doing*

Your lifetime with Eurotron starts at [www.eurotronbenelux.nl](http://www.eurotronbenelux.nl)

Discover the specs and the background information,

or request a quote via [sales@eurotronbenelux.nl](mailto:sales@eurotronbenelux.nl)

Feel free to give us a call: +31(0)594 696 131

Vossenkamp 7a

9351 VR Leek

The Netherlands

Tel +31(0)594 696 131

[sales@eurotronbenelux.nl](mailto:sales@eurotronbenelux.nl)

[www.eurotronbenelux.nl](http://www.eurotronbenelux.nl)

